


# LTCN10

## Zoom Camera Module (2 MP, 60 fps, 44X)

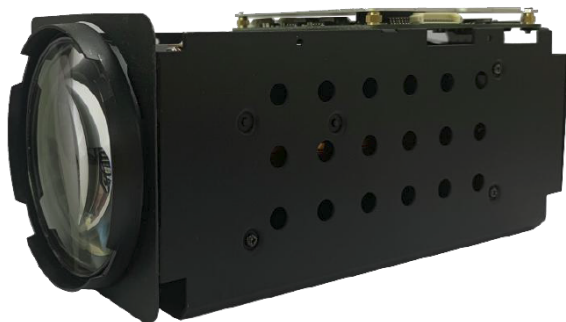

<b>Model</b>	<b>LTCN10</b>
<b>WhiteBalance</b>	Auto/indoor/outdoor/OPW/ATW/manual
<b>Auto gain</b>	Auto/Manual
<b>PTZ Control Protocol</b>	40 types of control protocol including Pelco D/Pelco P
<b>Certifications</b>	ONVIF, PSIA
<b>Operating Ambient Temperature</b>	-10 °C to 50 °C (14 °F to 122 °F)
<b>Relative Humidity</b>	5 % to 95 % noncondensing
<b>Input Power</b>	12 V DC
<b>Power Consumption</b>	13.6 W maximum
<b>Dimensions (W x H x L)</b>	73 mm x 77 mm x 174 mm (2.9 in x 3.0 in x 6.9 in)
<b>Weight</b>	724 g (1.6 lb)

\*Design and specifications are subject to change without prior notice.

### Features

- 1/2-inch CMOS
- 0.07 lux minimum illumination in black and white mode
- H.265/H.264/MJPEG compression
- 60 frame per second at 1920 x 1080
- 2-way audio
- Operating temperature range from -10 °C to 50 °C (14 °F to 122 °F)
- ONVIF compliant

### Tech Specs

<b>Model</b>	<b>LTCN10</b>
<b>Type</b>	Network camera module
<b>Image Sensor</b>	1/2-inch CMOS
<b>Lens</b>	f = 6.3 mm to 278 mm (44X), F/1.4 to F/5.0, auto focus, auto iris
<b>Digital Zoom</b>	16X
<b>View of Angle</b>	61.6° (wide) to 1.9° (tele)
<b>Effective Pixels</b>	1920 x 1080
<b>Minimum Illumination</b>	<ul style="list-style-type: none"> <li>▪ Color: 0.07 lux at (F/1.4, AGC on)</li> <li>▪ Day and Night: 0.0025 lux at (AGC on)</li> </ul>
<b>Electronic Shutter Range</b>	1/1 to 1/100,000 second
<b>Wide Dynamic Range (WDR)</b>	3D
<b>Digital Noise Reduction (DNR)</b>	0 to 5, total 6 steps
<b>Video Compression</b>	H.265/H.264/MJPEG
<b>Audio Compression</b>	G.711/AAC
<b>Frame Rate</b>	60 frames per second (1080p)